


# MS2V-T1S

Tuning Fork Crystal 30 kHz – 200 kHz



## DIMENSIONS

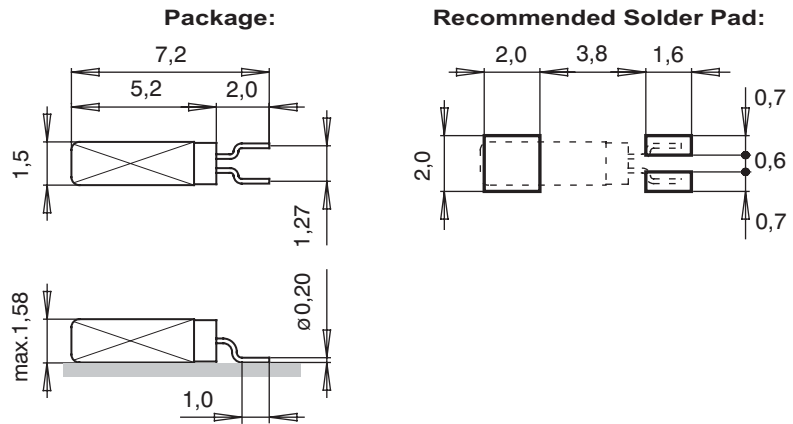

All dimensions in mm typical

**Miniaturized SMD package**  
**Package height 1.58 mm max.**  
**Formed leads for SMD mounting**  
**Industrial temp. range**  
**Very price competitive**  
**High stability**  
**Low aging**  
**Low power consumption**  
**High shock and vibration resistance**

## DESCRIPTION:

The MS2V-T1S is a miniature square-bodied 1.5 x 1.5 x 5 mm metal-can package with formed leads, intended for surface mounting and reflow soldering.

Within the package is a high-quality tuning fork quartz crystal resonator, manufactured with a precision high-volume photolithographic process and operating in the fundamental mode.

Due to highly automated, large-volume production, the MS2V-T1S is very price competitive and ideal for any consumer and industrial applications.

For pick-and-place equipment, the crystals are supplied in 16 mm tape: 13" (330 mm) reel with 9'000 crystals

## ELECTRICAL CHARACTERISTICS AT 25°C:

Frequency Range	$F_L$	30–200	kHz
Load capacitance <sup>1)</sup>	$C_L$	7.0 / 9.0 / 12.5	pF
Frequency tolerance <sup>2)</sup>	$\Delta F/F$	+/-20	ppm
	$\Delta F/F$	+/-30	ppm
	$\Delta F/F$	+/-100	ppm
Drive level max.	P	1.0	$\mu W$
Insulation resistance min.	$R_i$	500	M
Aging first year max.	$\Delta F/F$	+/-3	ppm

Frequency Example <sup>3)</sup>	$F_L$	32.000	32.768	75.000	kHz
Series resistance typ./max.	$R_S$	60 / 90	60 / 90	19 / 30	k
Motional capacitance typ.	$C_1$	2.3	2.3	1.45	fF
Static capacitance typ.	$C_0$	0.9	0.9	0.9	pF
Turnover temperature	$T_0$	25 +/-5	25 +/-5	22 +/-5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \text{ +/-} 10\%$			ppm

1) For standard and other load capacitances consult factory.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

**STANDARD FREQUENCIES:**

Frequency kHz				
32.000	32.768	38.400	75.000	76.800
77.500				
Other frequencies on request				


**ENVIRONMENTAL CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +85°C	
Operating temp. range		-40 to +85°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	+/-5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10-2000 Hz	+/-5 ppm

**TERMINATIONS AND PROCESSING:**

Type	Termination	Processing
MS2V-T1S	Can: Au flashed Leads: Formed leads Au flashed	For SMD mounting Reflow soldering 260°C / 20 sec. max

**PART NUMBER/ ORDERING INFORMATION EXAMPLE:**

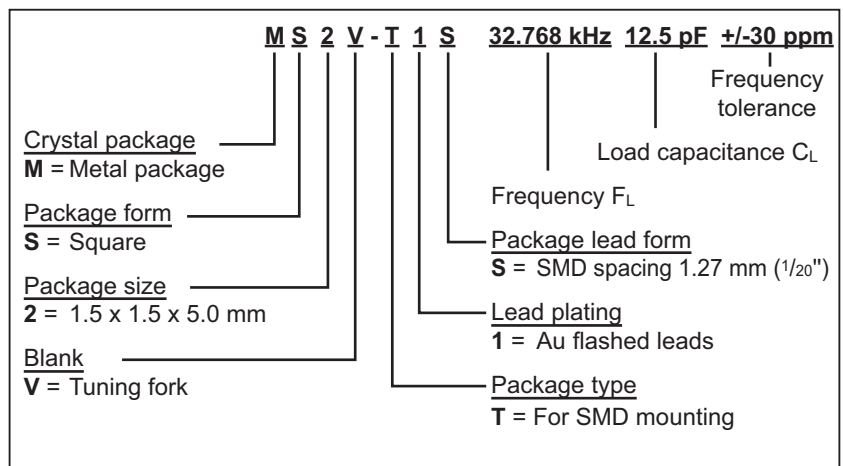

All specifications subject to change without notice. 04.05



A COMPANY OF THE **SWATCH GROUP**

**Headquarters:**

Micro Crystal  
Div. of ETA SA  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland  
Tel. +41 32 655 82 82  
Fax +41 32 655 82 83  
sales@microcrystal.ch  
www.microcrystal.ch

**North American Sales Office:**

Micro Crystal  
A Div. of The Swatch Group (U.S.) Inc.  
1615 Barclay Boulevard  
Buffalo Grove, IL 60089  
USA  
Tel. +1 847 818 9825  
Fax +1 847 818 9915  
sales@microcrystal.com  
www.microcrystal.com